

Styleline® LED Plus

EXTRAORDINARY ILLUMINATION & ENERGY SAVINGS



STYLELINE® LED Plus provides both reflective and refractive optics for superior light uniformity, merchandise visibility and glare reduction allowing your reach-in doors product stand out!

- DOE compliant
- Available for cooler & freezer applications
- Proven hardware simplicity and reliability
- 5 year warranty on workmanship and materials



STYLELINE® CLHH Shown

STYLELINE® LED Plus

Exceptional Performance & Energy Efficiency

Features

- DOE Compliant.
- Delivers bright and uniform light.
- Single power supply for up-to 5 door frames.
- Available in 3500K, 4000K & 5000K color temperatures.
- Slim and narrow design.
- Quick connect wiring configuration.
- Motion dimming included with HH/LT systems. NT optional.
- Up to 85% energy savings compared to fluorescent fixtures.
- Available in 60", 72" and 80" sizes.
- 5-year warranty.




—● Center Mullion Light

—● End Mullion Light

Light Distribution

STYLELINE LED Plus provides both reflective and refractive optics for superior light uniformity, merchandise visibility and glare reduction allowing your reach-in doors product stand out!

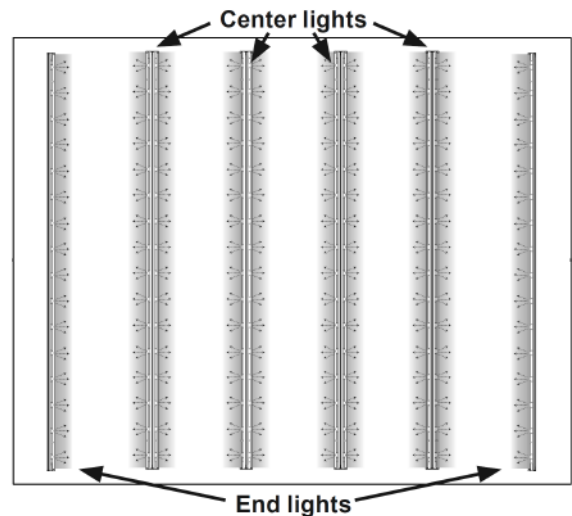

STYLELINE® LED Plus



STYLELINE® RM Shown

Specifications

Lighting

Color temperatures (CCT)..... 3500 K, 4000 K, 5000 K

Color rendering..... >80 CRI

Performance

Operating temperature..... -13° F to 122° F (-25° C to 50° C)

Life rating >60,000 hours (L₉₀)
at maximum operating conditions*

Dimming Optional Motion Sensing (see Cold Series Dimming Control data sheet)*

Construction

Housing Aluminum / PC

Lens PMMA

Body color Black (White cover)

Documentation

Warranty 5-year limited

Agency listings..... cULus, UL Retrofit, UL (NSF/ANSI 2), CE, RoHS

Center Mullion Light 

End Mullion Light 



Motion Sensor



Dimensions L × W × H:
2.68" × 2.16" × 1.77"

Brightness

Selectable Duty Cycle output via SW1 and SW2
(Brightness Level when shoppers in area)

SW1	SW2	SW3	SW4	Brightness Level
OFF	OFF	X	X	N/A
ON	OFF	X	X	Energy Saver
OFF	ON	X	X	Standard
ON	ON	X	X	MerchandiserMAX

Dimming

Selectable Duty Cycle output via SW3 and SW4
(Brightness Level when area is not occupied)

SW1	SW2	SW3	SW4	Brightness Level
X	X	OFF	OFF	0%
X	X	ON	OFF	12.5%
X	X	OFF	ON	25%
X	X	ON	ON	50%



Specifications subject to change without notice.

