



HEAVY DUTY DOOR


HINGE MOUNTING & ADJUSTMENT KIT

HD HINGE MOUNTING & ADJUSTMENT KIT 032014

HEAVY DUTY DOOR HINGE MOUNTING & ADJUSTMENT KIT

Caution:

Do not exceed three (3) holes tension for 180° door opening, or four (4) holes tension for 90° door opening.

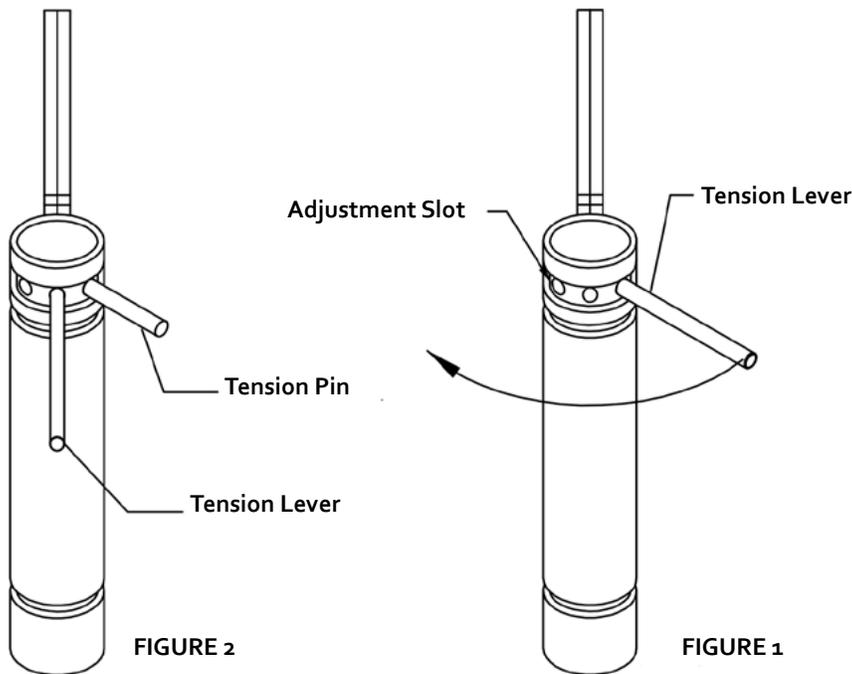

Caution:

Always install hinges with tension adjustment slot up as shown, always rotate tension lever to the left regardless of right or left hand door application.

HINGE INSTALLATION:

Install hinge in normal manner with the tension adjustment up as shown

ADJUSTING SPRINT TORQUE:

Place the door in closed position

Insert tension lever in right hand hole in adjustment slot. *See Figure 1*

Rotate tension lever to the left and insert tension pin loosely in hole to the right of tension lever as shown in *Figure 2*

Release tension lever until tension pin contacts the right hand side of adjustment slot

Remove tension lever, and try the door for closing force

If desired closing force is not achieved, repeat steps until closing force is satisfactory

When hinges have been adjusted to close door properly, drive the tension pin flush with the hinge tube.

PARTS INCLUDED

- 3- Hinge Adjustment Pin (Short)
- 1- Hinge Adjustment Too (Long)
- 11- Screw, 10-32 x 5/8" F.H.C.S. Black
- 1- HD hinge mounting & adjustment kit instructions