



# HYBRIDOOR

## LOW TEMP - DOOR WIRING INSTRUCTIONS

HYBRIDOOR\_LOW\_TEMP\_DOOR\_WIRING\_INSTRUCTIONS\_072014

# HYBRIDOOR LOW TEMP - DOOR WIRING INSTRUCTIONS

Installation manual available at [www.styleline.com](http://www.styleline.com)

## STEP BY STEP INSTRUCTIONS

1. Locate hold open cam at bottom hinge side of door. Lift cam off of slide pine located at frame bottom (**Figure 1**).
2. Release tension from torque rod by loosening nut at top hinge side of door (**Figure 2**).
3. Locate door and frame whips midway up the hinge side of the door (**Figure 3**).
4. Open door and locate the screws that hold on the door wire cover plate. Unscrew the screws and remove the cover plate (**Figure 4**).
5. Connect wires of the same color from door and frame to each other (**Figure 5, 6, 7**).
6. Tuck wire connections into slot in door. Make sure that green ground wire ring connector is able to be aligned up with hole directly above slot opening (**Figure 8**).
7. Use screws that were removed earlier to reattach cover plate with top screw going through ground ring connector (**Figure 9**).
8. Remove screw that holds on restraining clamp. Snap clamp around cord and screw into hole (**Figure 10, 11, 12**).
9. Reinstall hold open cam at the bottom hinge side of door (**Figure 13**).
10. Apply tension to top hinge door (**Figure 14**).



Figure 1



Figure 2



Figure 3

# HYBRIDDOOR LOW TEMP - DOOR WIRING INSTRUCTIONS



Figure 4



Figure 5

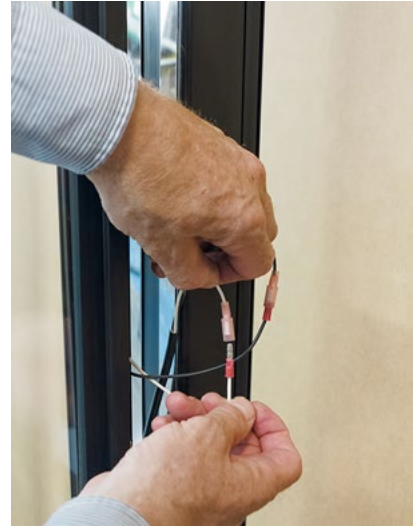


Figure 6



Figure 7



Figure 8

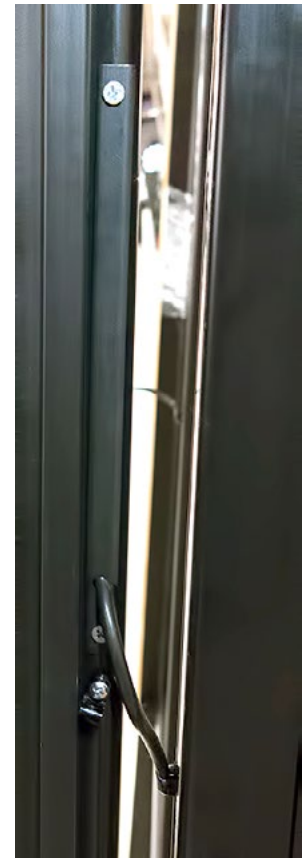


Figure 9

# HYBRIDDOOR LOW TEMP - DOOR WIRING INSTRUCTIONS



Figure 10



Figure 11

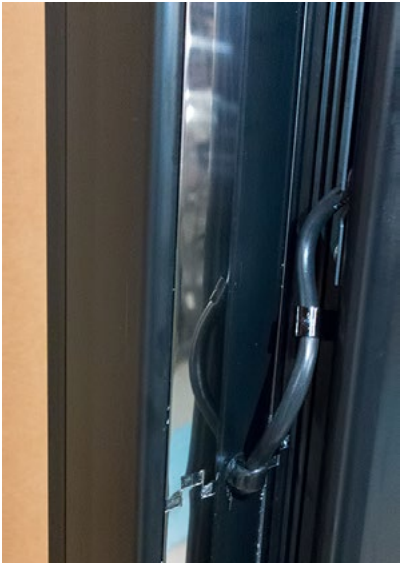


Figure 12

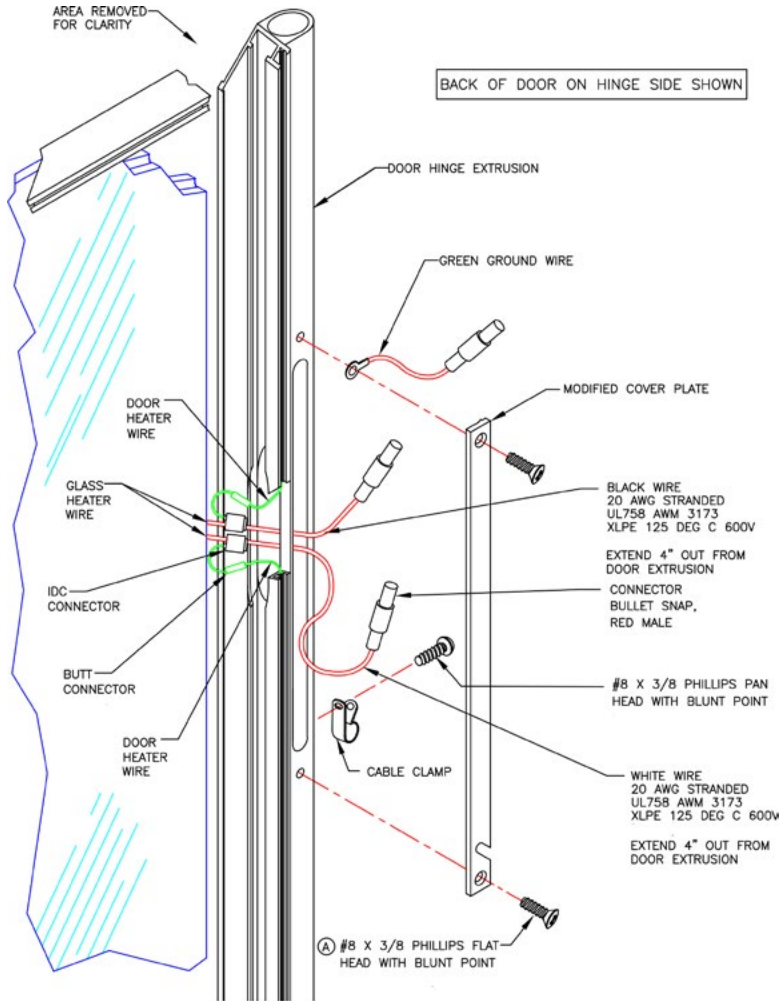


Figure 13

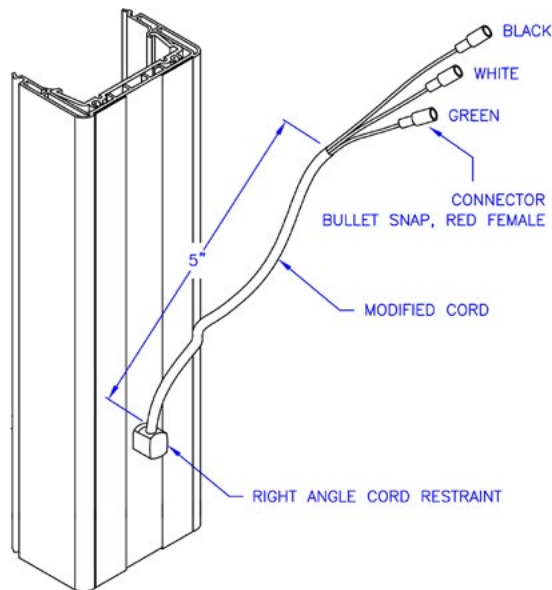


Figure 14

# HYBRIDDOOR LOW TEMP - DOOR WIRING INSTRUCTIONS DRAWINGS



## Back of Door



## Frame Mullion